




# 油壓捲圓機

# CMR Series


## Hydraulic Rolling Machine

油壓捲圓機採雙軸式結構，經油壓系統使工件穩定成型，主動輪包覆優力膠，可使主軸延長使用壽命，而且保護工件不易刮傷，數值型高度顯示器，可做精準高度定位，可依工件長度選擇機型及選擇加裝套管支撐座。


The machine adopts twin-shaft structure and works through hydraulic system can make workpiece be stably formed. The driving wheel covered with rubber can lengthen the spindle's life and protect workpiece from scraping. Numerical height display can do exact height positioning. Can select the required model and additional sleeve supporting base as per the length of workpiece.




數值型高度顯示器  
Numerical height display

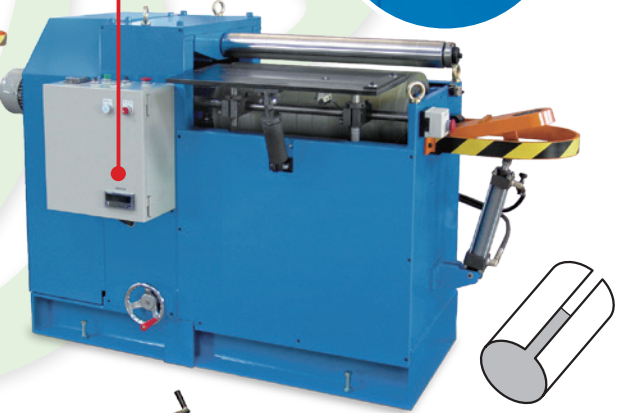

**CMR** 油壓捲圓機 Hydraulic Rolling Machine

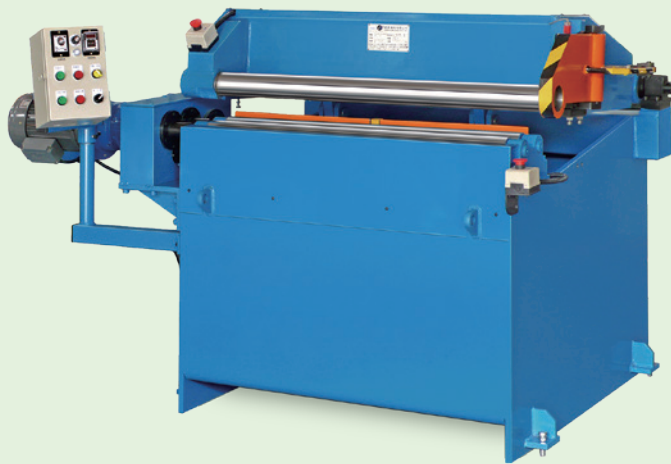

**CMRD** 油壓三軸捲圓機 特殊型  
Hydraulic 3-shaft Rolling Machine (special type)

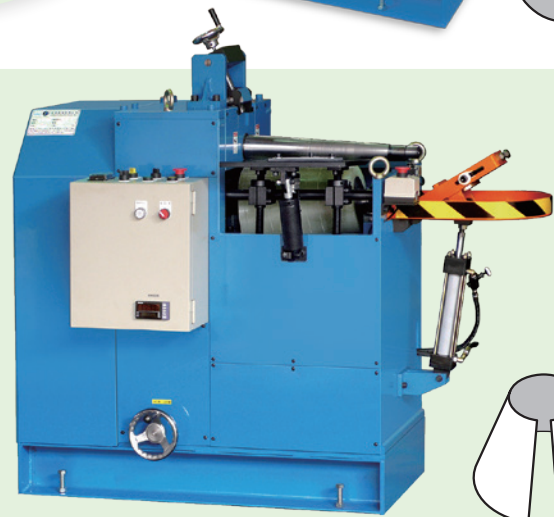

**CMRS** 油壓錐度捲圓機 特殊型  
Hydraulic Taper Rolling Machine (special type)

型號 Model No	有效捲圓長度 Effective rolling length	捲圓厚度 Rolling thickness	套管支撐座 Sleeve supporting base	捲圓壓力 Rolling pressure	入力電源 Input Power	驅動馬達 Driving motor
CMR-600	600mm	SS41 0.3~2mm	無 (No)	油壓 Hydraulic	220V 3Ø	AC motor
CMR-800	800mm		無 (No)		220V 3Ø	AC motor
CMR-1000	1000mm	SUS 0.3~2mm	無 (No)		220V 3Ø	AC motor
CMR-1300	1300mm		有 (Yes)		220V 3Ø	AC motor
CMR-1600	1600mm		有 (Yes)		220V 3Ø	AC motor
CMRT	訂製品		0.3~4mm		有 (Yes)	220V 3Ø